


Engelmann Compact Heat Meter

SensoStar Q

Multi-jet flow sensor for inline installation points

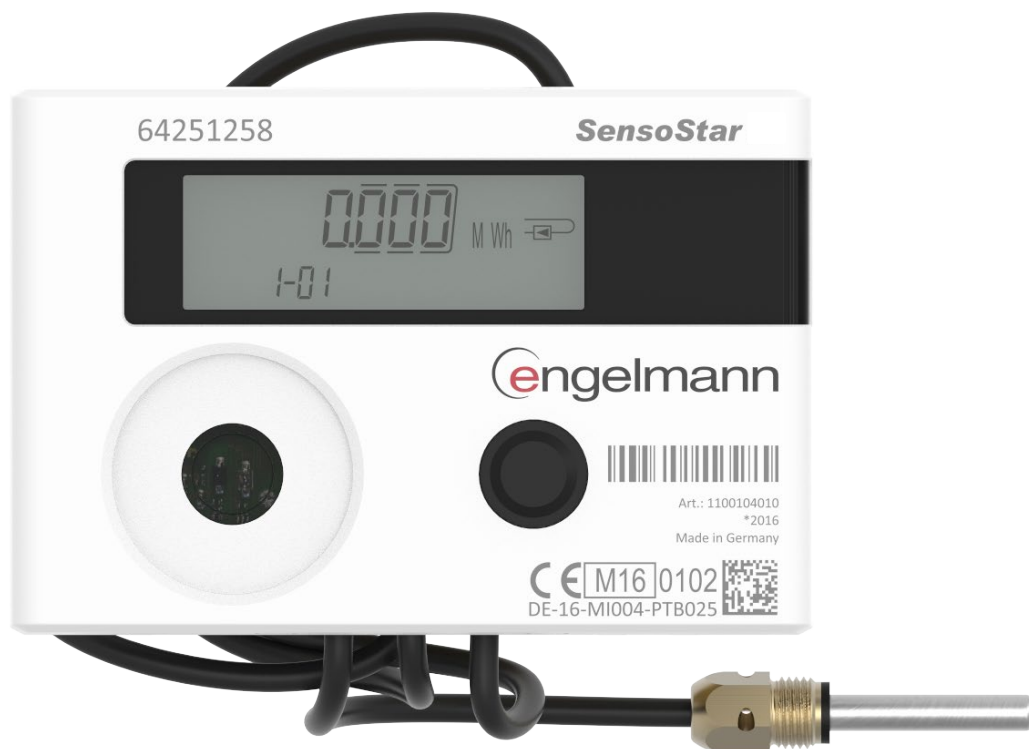

- Detection of back flow
- Measuring cycle temperature, dynamic: 2 / 60 s
- Outlet flow and inlet flow can be set on site
- Detachable calculator unit, pulse cable length 50 cm (optional)
- Communication interfaces:
 - wireless M-Bus;
 - wireless M-Bus + 3 pulse inputs;
 - M-Bus;
 - M-Bus + 3 pulse inputs;
 - 1 pulse output;
 - 2 pulse outputs

Technical data:

Flow sensor

Measuring method			bidirectional inductive scanning system		
Sizes	Nominal flow q_p	m^3/h	0,6	1,5	2,5
	Low flow threshold	l/h	4	4	5,5
	Minimum flow q_i	l/h	30	30	50
	Maximum flow q_s	m^3/h	1,2	3	5
Pressure drop Δp at q_p		bar	0,03	0,2	0,24
Pressure drop Δp at q_s		bar	0,1	0,74	0,92
Nominal diameter		mm	DN 15	DN 15	DN 20
Thread		inch	G3/4B	G3/4B	G1B
Length		mm	110	110	130
Dynamic range q_i/q_p			1:20	1:50	1:50
Accuracy class (MID)			class 3		
Nominal pressure PN		bar	16		
Temperature range medium heat		°C	15 - 90		
Temperature range medium cooling		°C	5 - 50		
(q _o 1,5 and q _o 2,5)					
Point of installation			outlet flow and inlet flow; can be set when the amount of energy is still ≤ 10 kWh		
Mounting position			any position		
Protection class			IP65		
Medium			water;		
			optional, without approval*: water with a propylene glycol or ethylene glycol percentage rate of 20 %, 30 %, 40 % or 50 %		
			(* type and concentration of glycol can be set at any time)		

Calculator unit

Temperature range medium heat	°C	0 – 150
Temperature range medium cooling	°C	0 – 50
(q_p 1,5 and q_p 2,5)		
Ambient temperature in the field	°C	5 – 55 at 95 % relative humidity
Transport temperature	°C	-25 – 70 (for maximal 168 h)
Storage temperature	°C	-25 – 55
Temperature difference range $\Delta\theta$ heat	K	3 – 100
Temperature difference range $\Delta\theta$ cooling	K	-3 – -50
Minimum temperature difference $\Delta\theta$ heat	K	> 0,05
Minimum temperature difference $\Delta\theta$ cooling	K	< -0,05
Minimum temperature difference	K	> 0,5 / < -0,5
$\Delta\theta_{HC}$ heat / cooling		
Resolution temperature	°C	0,01
Measuring cycle temperature; dynamic	s	2 / 60; using a power pack: 2 s permanent
Display		LCD - 8 digits + special characters
Decimal places		up to 3 after comma
Units		MWh, kW, m^3 , m^3/h (kWh, GJ, MMBTU, Gcal); unit of energy can be set when the amount of energy is still ≤ 10 kWh
Interfaces		optical interface (M-Bus protocol); optional: wireless M-Bus; wireless M-Bus + 3 pulse inputs; M-Bus; M-Bus + 3 pulse inputs; 1 pulse output; 2 pulse outputs

Power supply		exchangeable 3 V lithium battery; all types prepared for 3 V power pack (input voltage 230 V / 24 V)
Estimated lifetime	years	10 (no option: 1 pulse output); 6+1
Data storage		nonvolatile memory
Reading dates		selectable yearly reading date; 15 monthly and semimonthly values via display or wireless M-Bus (compact mode); 24 monthly and semimonthly values via optical interface or M-Bus can be set individually; adding up energy or time
2 tariff registers		flow, power and temperatures (inlet, outlet, $\Delta\theta$), plus the respective maximum values of the last 15 months
Storage of maximum values		IP65
Protection class		yes
CE		EN 1434
EMC		

Temperature sensors (2-wire technique)

Platinum precision resistor		Pt 1000
Diameter	mm	5; 5,2; 6; AGFW 27,5; 38; needle sensor 3,5 x 75
Length of cable	m	1,5; 3; 6
Installation		asymmetrical; symmetrical

Weights

Weight (basic version, kg)	$q_p 0,6 / q_p 1,5$	$q_p 2,5$
Calculator not detachable	0,875	0,955
Calculator detachable	0,915	0,995

Dimensions

Pulse cable length (only separable version)	m	0,50
Calculator housing (H x W x D)	mm	75 x 110 x 34,5
Thread	$q_p 0,6 / q_p 1,5: G3/4", DN 15$	$q_p 2,5: G1", DN 20$

(on the right the separable version with a detachable calculator)

